





2 164 1ST GRADE CLASSROOM 14.1 1/4" = 1'-0"

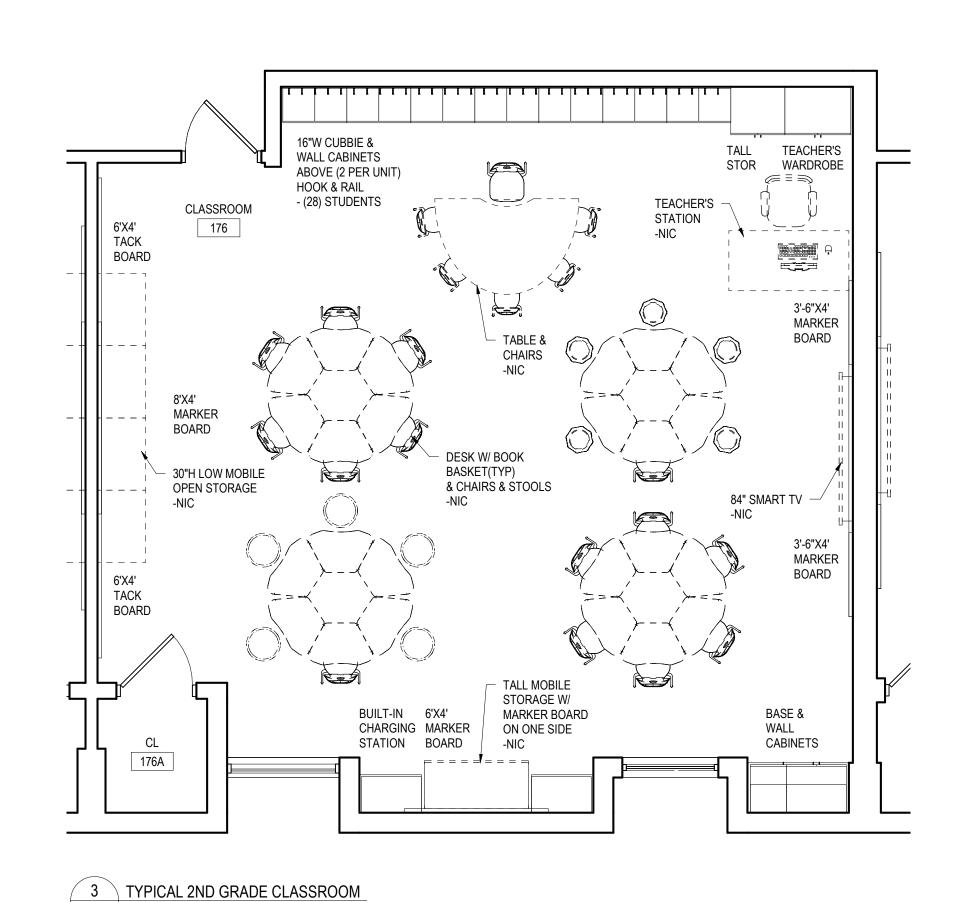


TALL TEACHER'S WALL CABINETS STOR WARDROBE HOOK & RAIL - (28) STUDENTS CLASSROOM 174 TACK TABLE & CHAIRS -NIC TEACHER'S -STATION 3'-6"X4' BOARD MARKER BOARD - 30"H LOW MOBILE OPEN STORAGE BASKET & CHAIRS & STOOLS MARKER STORAGE W/ MARKER BOARD ON ONE SIDE WALL CABINETS

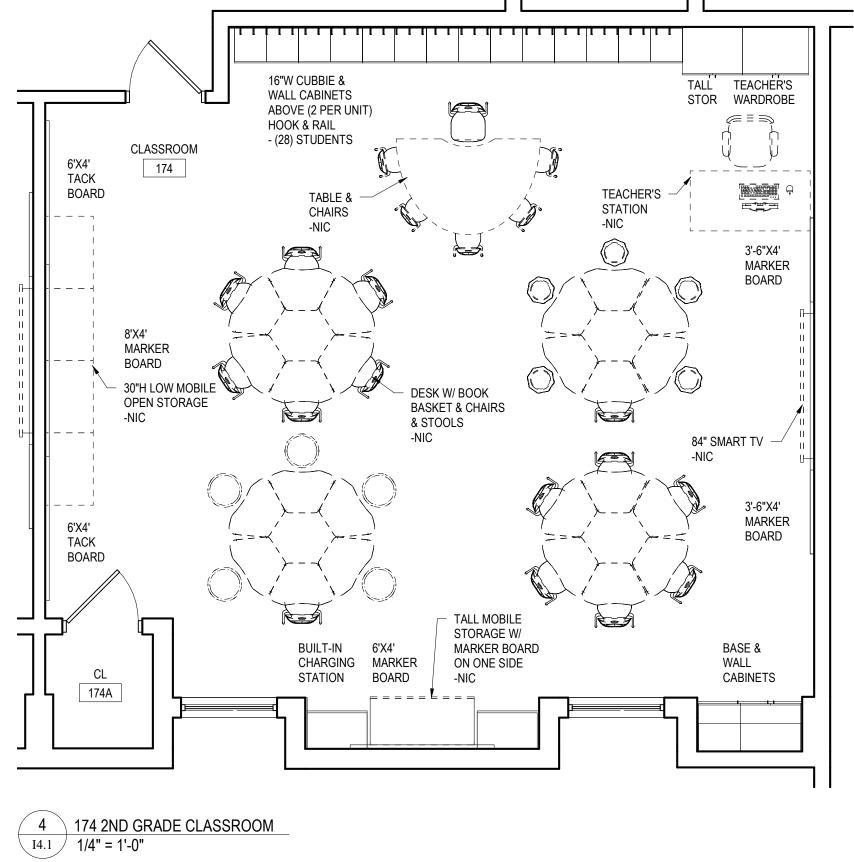


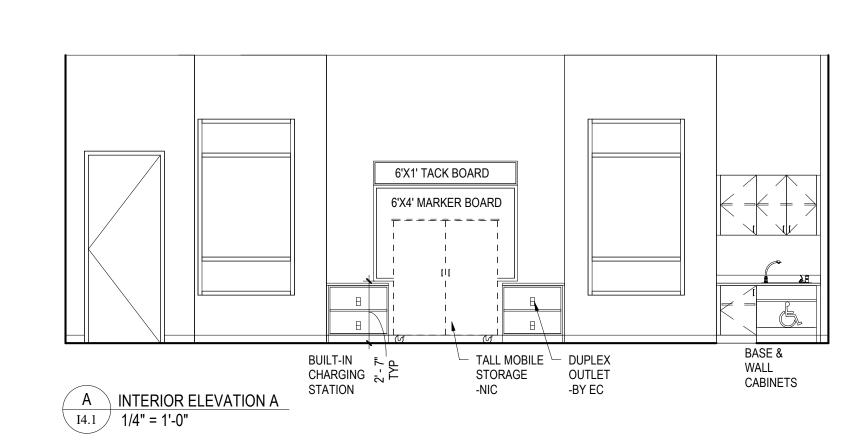

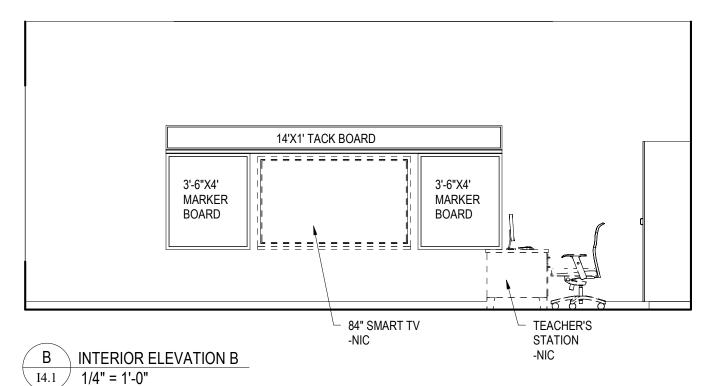

16"W CUBBIE & WALL CABINETS TEACHER'S TALL WARDROBE STOR ABOVE (2 PER UNIT) W/ COAT HOOK (34) C INTERIOR ELEVATION C
I4.1 1/4" = 1'-0" RAIL BELOW -(28) STUDENTS

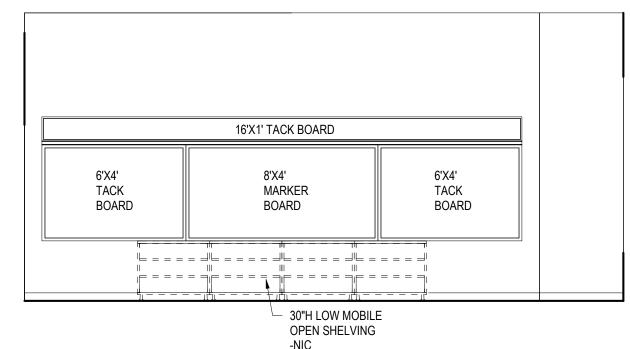

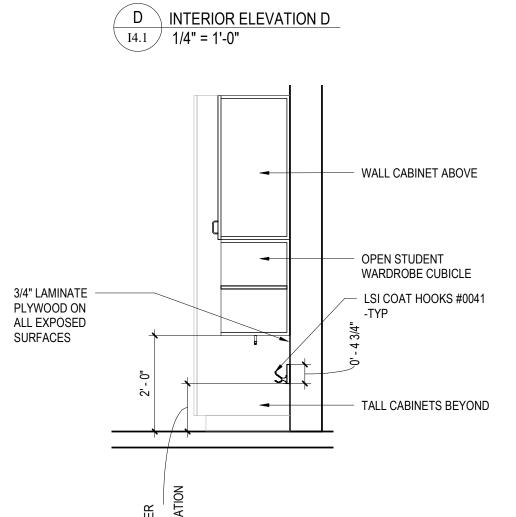

6 COAT HOOK DETAIL - 1ST GRADE

GENERAL NOTE IN REFERENCE TO 14.1	
1. ALL SINKS SHALL RECEIVE B	BUBBLERS.
GRADE 1-5 MOUNTING HEIGHT SCHEDULE	
MARKER BOARD	2'-6" AFF TO BOTTOM EDGE
TACK BOARD	2'-6" AFF TO BOTTOM EDGE
BASE CABINETS	2'-6" AFF TO TOP OF CABINET
WALL CABINETS	7'-0" AFF TO TOP OF CABINET
SMART TV - OWNER PROVIDED/OWNER INSTALLED	2'-6" AFF TO BOTTOM EDGE

GENERAL NOTES TO APPLY TO ALL 14 DRAWINGS 1. MOUNTING HEIGHT SCHEDULE IS APPLICABLE TO MOST ROOMS. IN INSTANCE WHERE NOTE/DETAILS ON DRAWINGS DO NOT COINCIDE WITH THE SCHEDULE. THE DRAWINGS TAKE

2. ALL BASE CABINETS SHALL RECEIVE A CONTINUOUS 1-1/4" THICK LAMINATE COUNTERTOP WITH A 4"H BACKSPLASH UNLESS NOTED OTHERWISE. THE DEPTH OF THE COUNTERTOP SHALL EXTEND 3/4" PAST THE DEPTH OF THE BASE CABINET. 3. COUNTERTOPS THAT RETURN INTO A WALL(S) SHALL RECEIVE BACKSPLASH THAT WRAPS

4. PROVIDE CHAMFERED EDGE CORNER FOR ALL COUNTERTOPS ADJACENT TO ALL TALL STORAGE UNITS.

5. WHERE COLUMNS, WINDOWS OR OTHER BUILDING COMPONENTS CONFLICT WITH

9. CASEWORK SPECIFIED AS 'LSI SCIENCE' SHALL RECEIVE EPOXY SINKS, COUNTERTOP WITH 4"H BACKSPLASH UNLESS OTHERWISE NOTED. EPOXY SINKS, FAUCETS AND BUBBLERS SHALL BE PROVIDED AND INSTALLED BY CASEWORK CONTRACTOR. CONNECTIONS SHALL BE PROVIDED

BY PLUMBING CONTRACTOR. 10. ALL VISUAL DISPLAY AREAS (MARKER BOARDS AND/OR TACK BOARDS) 10'-0"W OR LONGER SHALL RECEIVE 2"H MAP RAIL THAT SPANS FROM VERTICAL EDGE TO VERTICAL EDGE. 11. PROVIDE WOOD BLOCKING IN METAL STUD WALLS, PER MANUFACTURER'S

RECOMMENDATIONS, TO RECEIVE THE TELEVISION WALL BRACKET. 12. IN ROOMS RECEIVING RESILIENT BASE, ADHERE TO ALL WALLS, BASE CABINET TOE KICKS, AND EXPOSED END PANELS. REFER TO SPECIFICATIONS FOR LOCATION OF 4" AND 6" BASE. 13. SEE REFLECTED CEILING PLANS FOR LOCATION OF WINDOW TREATMENTS.

14. TELEPHONE UNITS AND SYSTEMS ARE NOT IN CONTRACT. 15. COORDINATE ALL LARGE SCALE PLANS WITH MECHANICAL, ELECTRICAL AND PLUMBING DRAWINGS.

16. NIC = NOT IN CONTRACT 17. WHEN DESCRIPTION AND MODEL NUMBER IN CASEWORK AND EQUIPMENT SCHEDULE

ALL REPORTS. PLANS SPECIFICATIONS AND COMPUTER FILES RELATING TO THIS PROJECT ARE THE PROPERTY OF CRABTREE, ROHRBAUGH & ASSOCIATES. OF THE MATERIAL HEREIN OR SUBSTANTIAL USE WITHOUT WRITTEN PERMISSION OF CRABTREE, ROHRBAUGH & ASSOCIATES VIOLATES THE COPYRIGHT LAWS OF THE

CRABTREE ROHRBAUGH & ASSOCIATES RETAINS ALL COMMON LAW, STATUTE AND OTHER RESERVED RIGHTS INCLUDING THE COPYRIGHT THERETO. REPRODUCTION UNITED STATES AND WILL BE SUBJECT TO LEGAL PROSECUTION.
© CRABTREE, ROHRBAUGH & ASSOCIATES, INC 2018

REVISIONS 01 MM-DD-YR NAME DESCRIPTION OF CHANGES

BIG



LARGE SCALE LAYOUTS 1ST & 2ND GRADE CLASSROOMS

AUGUST 1, 2018

As indicated

FILENAME:

PROJECT 3196.1

ACCEPTED AS PRESENTED - SIGN _ ACCEPTED AS PRESENTED - SIGN ______ DATE _____ ACCEPTED W/COMMENTS - SIGN _ ACCEPTED W/COMMENTS - SIGN _____ **COMMENTS**

THE UNDERSIGNED IS (ARE) AUTHORIZED BY THE SCHOOL DISTRICT TO REVIEW AND ACCEPT THE DESIGN OF THE BUILDING SPACE(S)

CONTRACT (N.I.C.) ACCEPTANCE INDICATES THAT THE UNDERSIGNED HAS REVIEWED THE INFORMATION WITH THE ARCHITECT AND IS

AUTHORIZING THE ARCHITECT TO IMPLEMENT THE DESIGN IN THE FINAL CONSTRUCTION DOCUMENTS.

 \setminus 14.1 / 1/4" = 1'-0"

*LAYOUT SHALL BE APPLIED TO THE FOLLOWING ROOMS: 176 & 177.

CORNER ALONG WALL(S).

CASEWORK DIMENSIONAL REQUIREMENTS. FIELD VERIFY DIMENSIONS AND PROVIDE CUSTOM UNIT TO ALLOW PROPER FITTING. 6. ALL EXPOSED ENDS OF CASEWORK SHALL RECEIVE FINISHED END PANELS. 7. LAMINATE COLOR FOR INTERIOR OF OPEN CABINETS SHALL MATCH EXTERIOR LAMINATE

8. STAINLESS STEEL SINKS, FAUCETS, AND BUBBLERS SHALL BE PROVIDED AND INSTALLED BY PLUMBING CONTRACTOR.

CONFLICT, THE DESCRIPTION TAKES PRECEDENCE.

18. OPP = OPPOSITE HAND.